

ANCHORRACK®

Anchored Mounting System

ZERO BALLAST - COST EFFICIENT - EASY TO INSTALL

ANCHORRACK® has been designed to eliminate rooftop ballasting and provide a system both affordable and favorable to weight-challenged roofs. Wood screws penetrate the roof surface to create a secure attachment against high wind loads while high-grade flashing allows for a permanent seal against the elements.

ANCHORRACK®'s installation is made simple with pre-punched screw holes, click-in module clamps, and light-weight aluminum components. The durable components are built-to-last with flexibility in tilt angle, row spacing and panel orientation, making it the most modular anchored systems on the market.



FEATURES

- Fully anchored rooftop mounting solution with zero ballast
- Designed based on SEAOC's wind design guidelines for solar arrays
- Only 2 main components for rapid installation
- Durable flashing for a long-lasting, permanent seal
- 5" roof clearance to allow for rooftop obstacles
- Easy panel mounting with self-grounding, click-in module clamps
- 10-year standard product warranty, extended warranty available


ANCHORRACK®

Anchored Mounting System



TECHNICAL SPECIFICATIONS

| | |
|------------------|--|
| Inclinations | 5°, 10°, 12°, 15° |
| Wind Speed | Up to 140mph for Exposure B; 117mph for Exposure C |
| Module Sizes | All standard 60, 72 & 96 cell panels |
| Grounding Method | ETL certified grounding clamps, grounded only once per array |
| Flashing | Pre-attached tape and liner with secondary LPS sealant |
| Orientation | Landscape / Portrait |
| Building Height | Up to 60' (18.3m), higher upon request |
| Roof Type | All types of flat roofs |
| Roof Pitch | Up to 45° |
| Material | Aluminum, stainless steel fasteners and screws |
| Row Spacing | 49.2" - 58.3" / 1.25m - 1.48m, Custom row spacing available. |

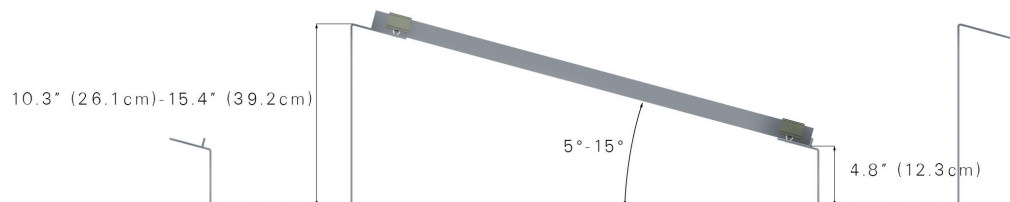

MADE IN AMERICA



MADE IN CANADA